


Ni-Cd rechargeable cylindrical cell (Data Sheet)


Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	14.0±0.2mm	
	Height	43.0±0.3mm	
	Apx. Weight	20g	
0.2C Discharge Capacity	Typical	750mAh	
	Minimum	700mAh	
Typical Internal Impedance		Less than 35mΩ	
Charge	Standard	70mA for 16 hrs	
	Fast	350mA for about 150min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
< 3 months		-10°c to 40°c	


CHARGE CHARACTERISTICS

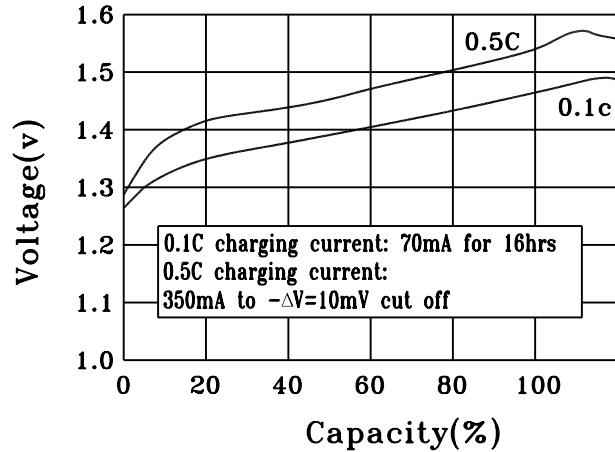


DISCHARGE CHARACTERISTICS

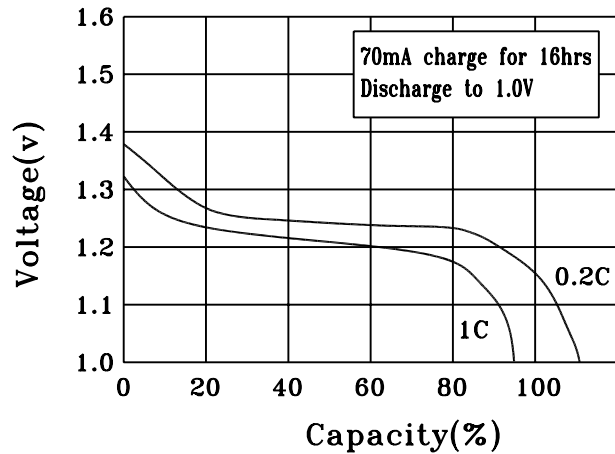

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

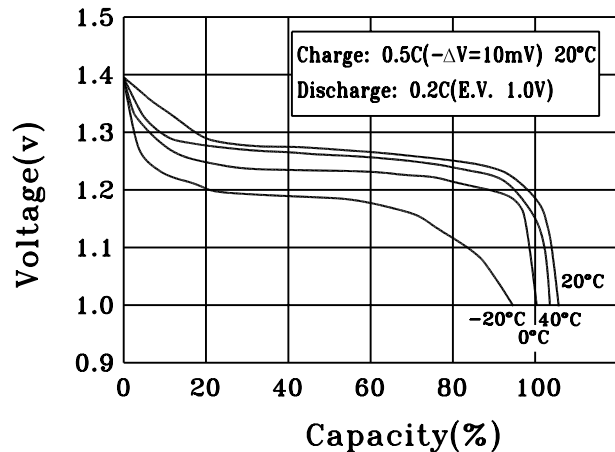

(CELL DIMENSIONS)

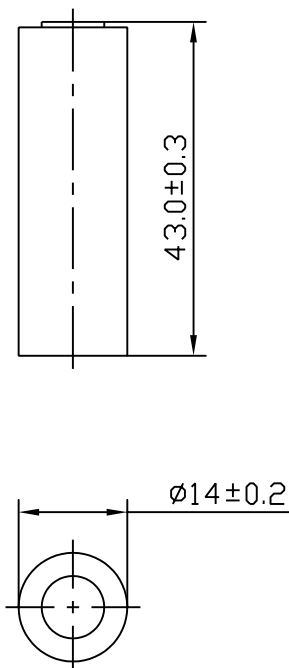

(With tube)

1:1