


Ni-Cd rechargeable cylindrical cell (Data Sheet)


Specification

|                            |             |                       |               |
|----------------------------|-------------|-----------------------|---------------|
| Nominal Voltage            |             | 1.2V                  |               |
| Dimensions                 | Diameter    | 16.5±0.2mm            |               |
|                            | Height      | 28.0±0.3mm            |               |
|                            | Apx. Weight | 20g                   |               |
| 0.2C Discharge Capacity    | Typical     | 750mAh                |               |
|                            | Minimum     | 700mAh                |               |
| Typical Internal Impedance |             | Less than 25mΩ        |               |
| Charge                     | Standard    | 70mA for 16 hrs       |               |
|                            | Fast        | 700mA for about 75min |               |
| Life expectancy            |             | 500 cycles            |               |
| Operating Temperature      | Charge      | Standard              | 0°C to 40°C   |
|                            |             | Fast                  | 10°C to 40°C  |
|                            | Discharge   |                       | -10°C to 50°C |
|                            | Storage     | < 1 year              | -10°C to 30°C |
| < 3 months                 |             | -10°C to 40°C         |               |


CHARGE CHARACTERISTICS

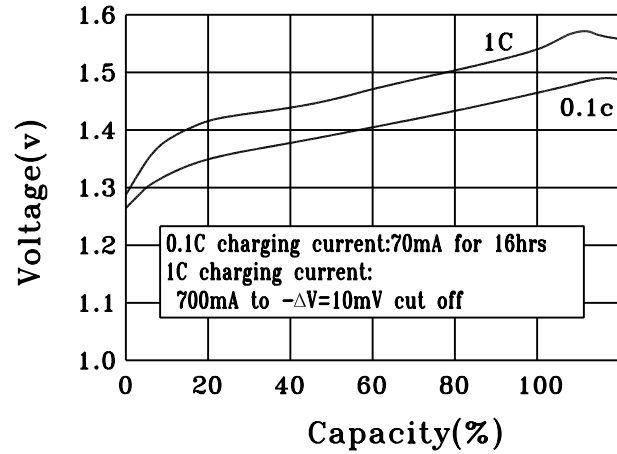


DISCHARGE CHARACTERISTICS

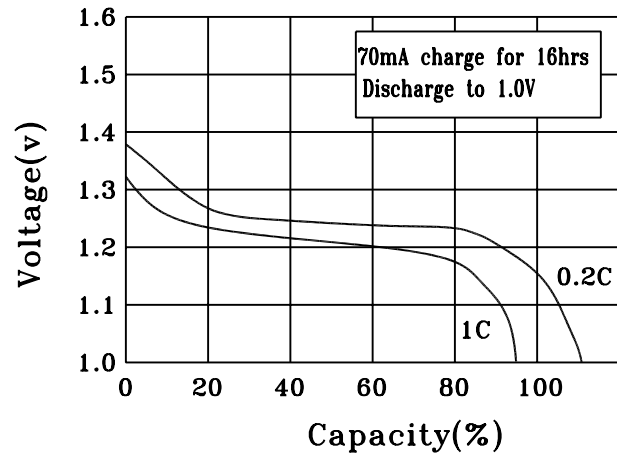

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

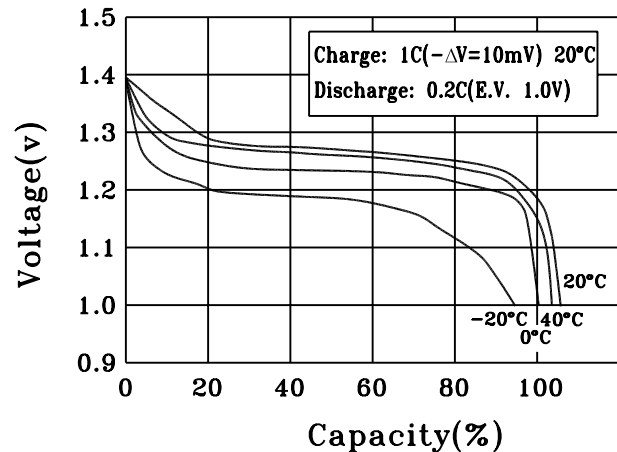

(CELL DIMENSIONS)

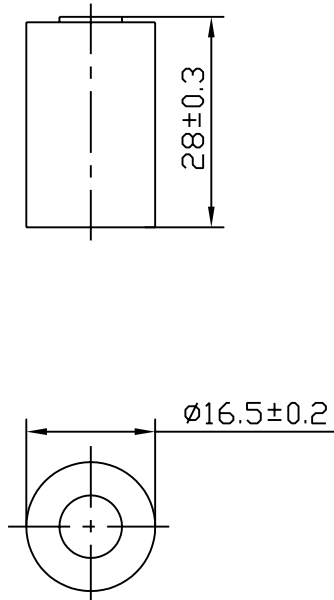

(With tube)

1:1