


Ni-MH rechargeable cylindrical cell (Data Sheet)


Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	10.0±0.2mm	
	Height	15.0±0.3mm	
	Apx. Weight	6g	
0.2C Discharge Capacity	Typical	130mAh	
	Minimum	120mAh	
Typical Internal Impedance		Less than 150mΩ	
Charge	Standard	12mA for 16 hrs	
	Fast	120mA for about 75min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	< 1 year	-10°C to 30°C
< 3 months		-10°C to 40°C	


CHARGE CHARACTERISTICS

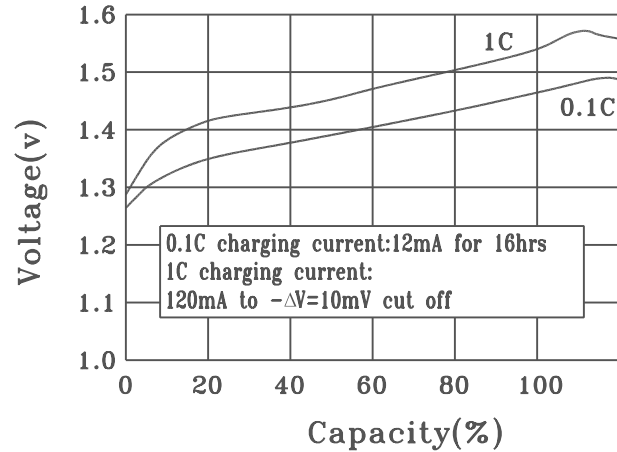


DISCHARGE CHARACTERISTICS

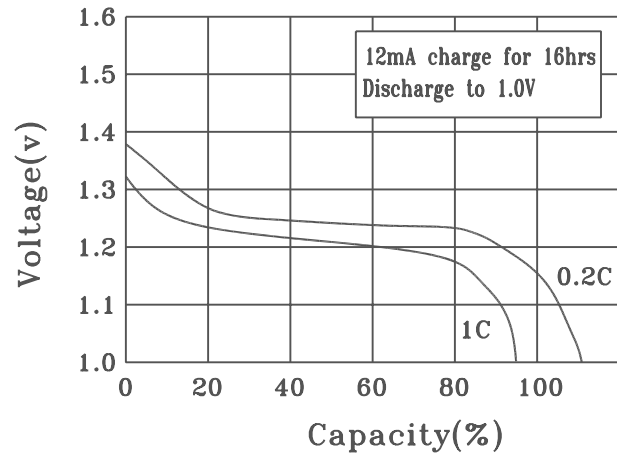

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

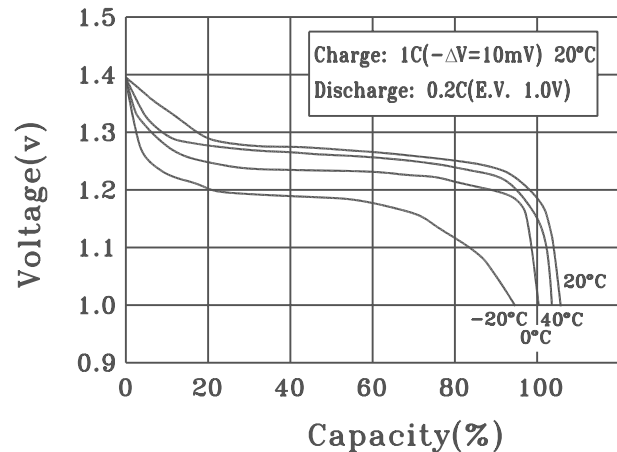

(CELL DIMENSIONS)

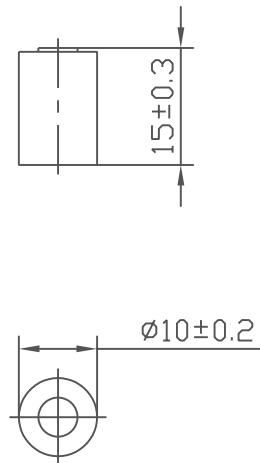

(With tube)

1:1