


Ni-MH rechargeable cylindrical cell (Data Sheet)


Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	32.2±0.2mm	
	Height	90.0±0.3mm	
	Apx. Weight	220g	
0.2C Discharge Capacity	Typical	13000mAh	
	Minimum	12900mAh	
Typical Internal Impedance		Less than 10mΩ	
Charge	Standard	1300mA for 16hrs	
	Fast	2600mA for about 390min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	< 1 year	-10°C to 30°C
< 3 months		-10°C to 40°C	


CHARGE CHARACTERISTICS

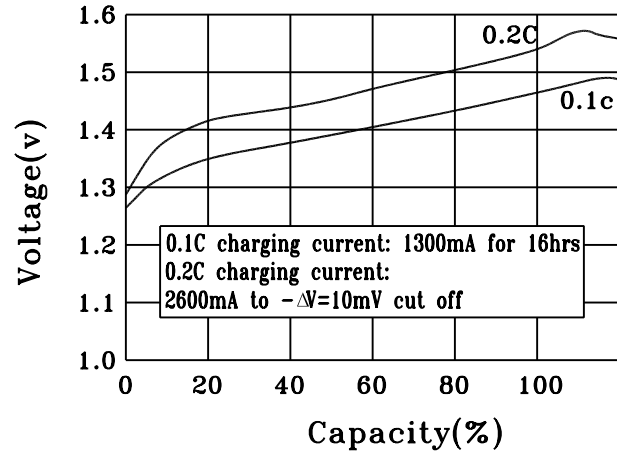

DISCHARGE CHARACTERISTICS

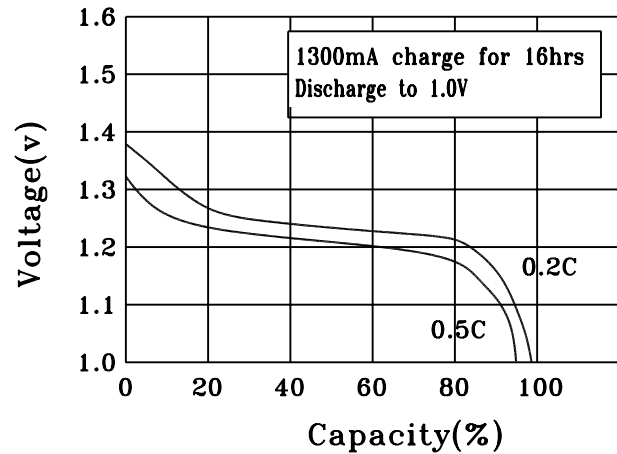

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

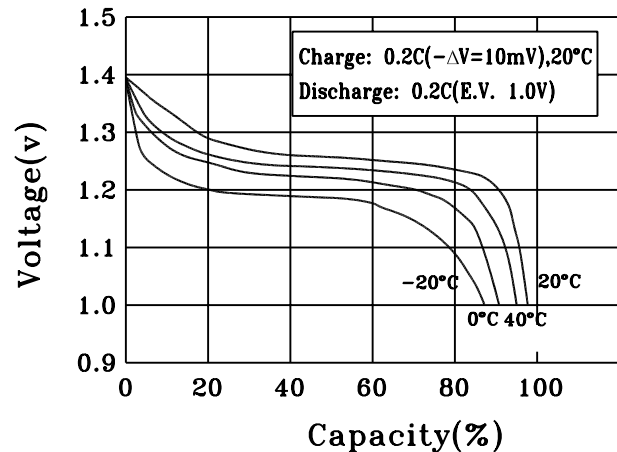

(CELL DIMENSIONS)



(With tube)

1:2