



Ni-MH rechargeable cylindrical cell (Data Sheet)

Specification


Nominal Voltage		1.2V	
Dimensions	Thickness	5.8±0.3mm	
	Width	16.5±0.3mm	
	Height	66.5±0.5mm	
	Apx. Weight	26g	
0.2C Discharge Capacity	Typical	1250mAh	
	Minimum	1250mAh	
Typical Internal Impedance		Less than 25mΩ	
Charge	Standard	120mA for 16 hrs	
	Fast	600mA for about 150min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
< 3 months		-10°c to 40°c	

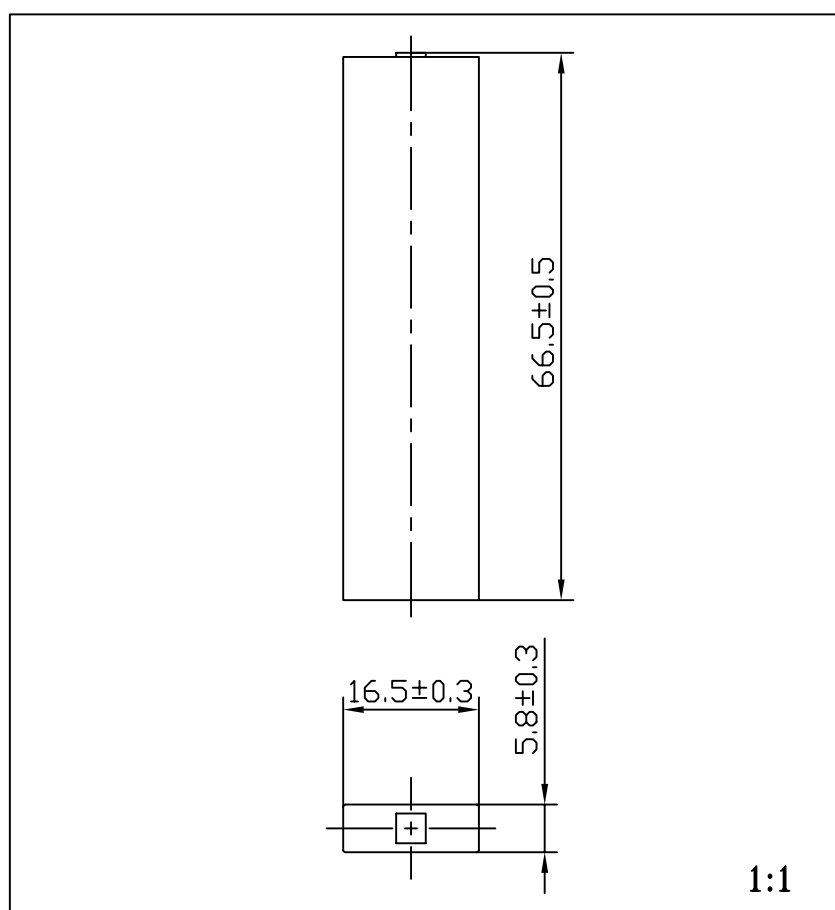

CHARGE CHARACTERISTICS

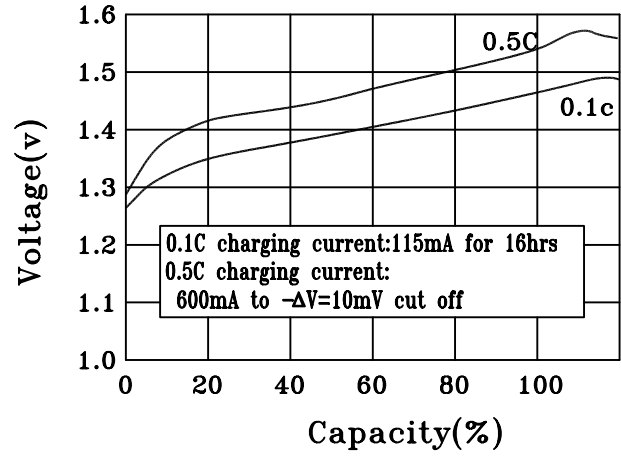

DISCHARGE CHARACTERISTICS

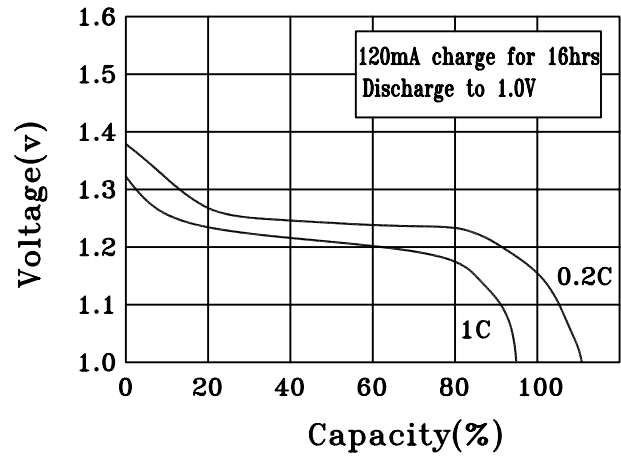

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

