


Ni-MH rechargeable cylindrical cell (Data Sheet)

Specification


Nominal Voltage		1.2V	
Dimensions	Diameter	10.0±0.2mm	
	Height	28.4±0.3mm	
	Apx. Weight	8g	
0.2C Discharge Capacity	Typical	320mAh	
	Minimum	300mAh	
Typical Internal Impedance		Less than 35mΩ	
Charge	Standard	30mA for 16hrs	
	Fast	300mA for about 75min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	< 1 year	-10°C to 30°C
< 3 months		-10°C to 40°C	

(CELL DIMENSIONS)

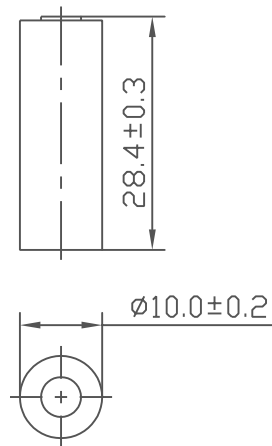


(With tube)

CHARGE CHARACTERISTICS

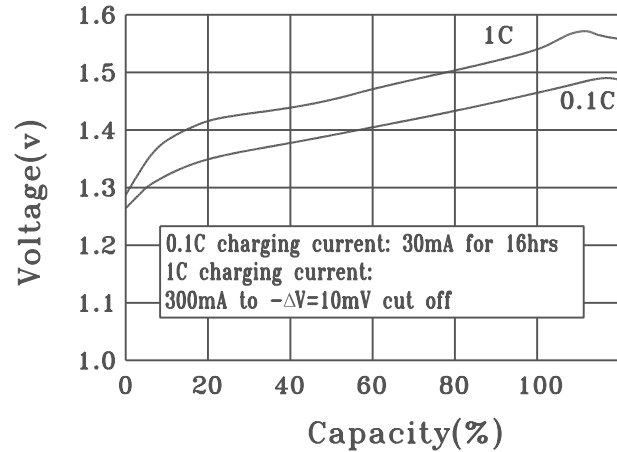

DISCHARGE CHARACTERISTICS

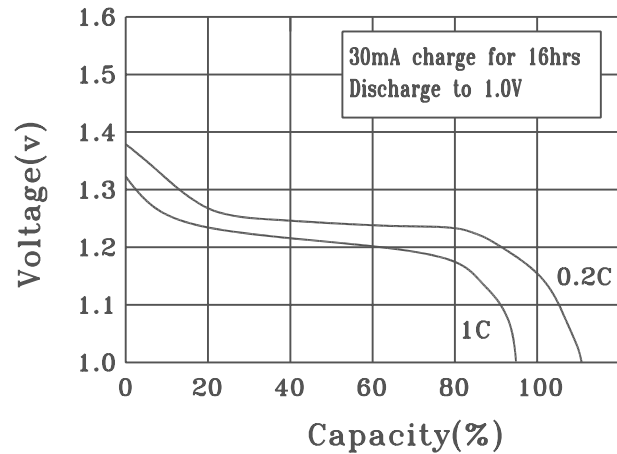

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

