



*Great Power Battery Co. Ltd.*

*Excellent Quality, Prompt Delivery and Competitive Price*

---

# APPROVAL SHEET

To: \_\_\_\_\_

Model: PH-AA2500H

Prepared by: \_\_\_\_\_

Checked by: \_\_\_\_\_

Approved by: \_\_\_\_\_

Add : 922 Xicun Section, Shiliang Road, Shawan Town, Panyu, Guangzhou, GD, PRC

PC : 511483

Tel: 86-20-61920399

Fax: 86-20-61981111

Email : [info@greatpower.net](mailto:info@greatpower.net)

Website: [www.greatpower.net](http://www.greatpower.net)

# **GREAT POWER BATTERY CO., LTD.**

## **1. Preface**

This specification is suitable for the performance of the **GREAT POWER** Ni-MH rechargeable battery.

## **2. Model**

PH-AA2500H

## **3. Appearance**

There shall be no such defects as deformation,flaw,stain,discoloration or electrolyte leakage.

## **4. Nominal specification**

<b>Description</b>		<b>Specification</b>	
Model		PH-AA2500H	
Size		AA	
Dimensions	Diameter(mm)	$14.2 \pm 0.3$	
	Height(mm)	$50.0 \pm 0.5$	
	Weight(g)	Approx.32g	
Nominal Voltage(V)		1.2	
Nominal capacity(mAh)		2500	
Internal Impedance(m $\Omega$ )		$\leq 30$	
Discharge Cut-off Voltage		1.0V	
Ambient temperature	Charge	standard	0°C to 40°C
		quick	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	<1 year	-10°C to 30°C
		<3 months	-10°C to 40°C
The relative humidity should keep with in $65 \pm 20\%$			

## **5.Characteristics**

Unless otherwise specified, the standard range of atmospheric conditions for test as follows:

Ambient temperature  $20 \pm 5^\circ\text{C}$

Relative humidity  $65 \pm 20\%$

**GREAT POWER BATTERY CO., LTD.**

Atmospheric pressure       $960 \pm 100\text{mbar}$

Accuracy of voltmeters and amperometers to be used in testing shall be equal to or better than the grade 0.5.


Test item		Condition		Specification
1. Charge	Standard	Charge at 0.1C for 16 hours		
	Quick	Charge at 0.2C to $-\Delta V=5-10\text{mV}$ (no more than 7hours)		
2. Discharge		At 0.2C to 1.0V		
3. Discharge cut-off voltage				1.0V
4.Capacity (mAh)	Minimum	Standard charge/discharge		2300mAh
	Typical	Standard charge/discharge		2500mAh
5. Internal resistance		After fully charge,rest 1 hour, measured at 1000Hz		$\leq 30\text{m}\Omega$
6. Self-Discharge		The charged battery is stored for 28 days at $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ . And the discharge time is measured at standard discharge		$\geq 180\text{minutes}$
7. High temperature test		Store at $40^{\circ}\text{C}$ 、 $50^{\circ}\text{C}$ 、 $60^{\circ}\text{C}$ for 2 hours then charge/discharge		No leakage
8. Low temperature test		Store at $0^{\circ}\text{C}$ for 2 hours then charge/discharge		No leakage
9. Short circuit test		Short circuit after fully charge		No explode
10. Drop test		Free fall on the concrete floor from 1 meter after fully charged		No leakage No short-circuit
11.Cycle life	Charge	Rest	Discharge	Capacity retention $\geq 60\%$ after 500cycles
1	0.1C for 16h	0	0.25C for 2h20min	
2~48	0.25C for 3h10min	0	0.25C for 2h20min	
49	0.25C for 3h10min	0	0.2C to 1.0V	
50	0.1C for 16h	1~4h	0.2C to 1.0V	

Ni-MH rechargeable cylindrical cell


Data Sheet

Nominal Voltage		1.2V	
Dimensions	Diameter	14.2±0.3mm	
	Height	50.0±0.5mm	
	Apx. Weight	32g	
0.2C Discharge Capacity	Typical	2500mAh	
	Minimum	2300mAh	
Typical Internal Impedance		Less than 30mΩ	
Charge		250mA for 16hrs	
Life expectancy		500 cycles	
Operating Temperature	Charge	0°c to 40°c	
	Discharge	-10°c to 50°c	
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


CHARGE CHARACTERISTICS

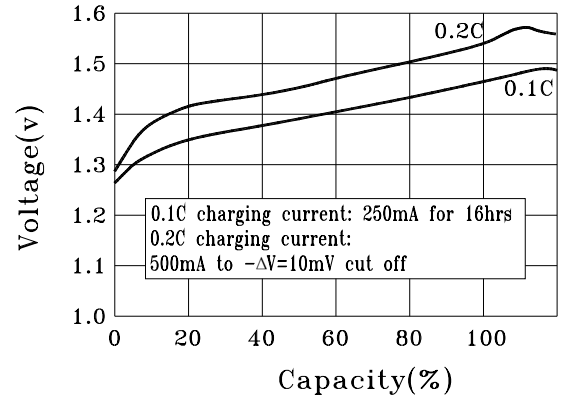


DISCHARGE CHARACTERISTICS

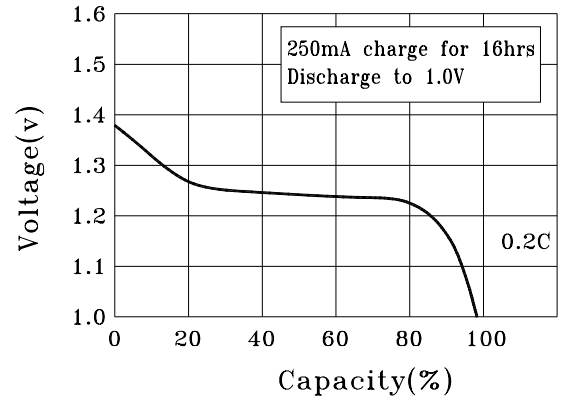

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

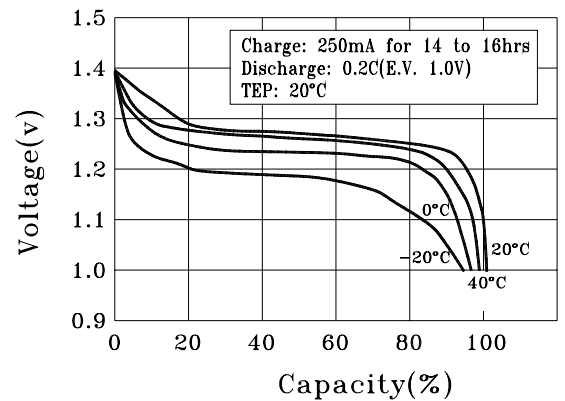

(CELL DIMENSIONS)

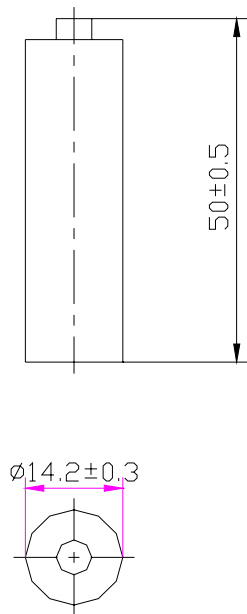

(With tube)

1:1